



- 19" 1U firewall server Rackmountable
- Good Quality 60W Switching Power supply
- Embedded Intel Atom/Bay Trail Series Processor
- Integrated 6\*Intel WGI210AT GBe Ethernet Ports (LAN5/6 POE)
- Front-panel with 1\*Console, 2\*USB2.0/3.0, 6\*GBe Lans,1\*PWR LED, 1\*HDD LED
- Back-panel with 1\*VGA,1\*PWR Socket (110V~240V)

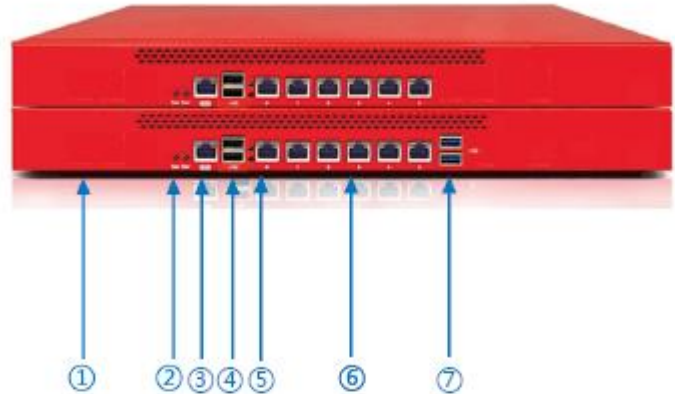

- ① Customized logo Available !
- ② 1\*PWR ,1\*RESET
- ③ 1\*Console
- ④ 2\*USB2.0
- ⑤ 1\*PWR LED, 1\*HDD LED
- ⑥ 6\*GBe LANs
- ⑦ 2\*USB3.0 (AR1250D)

## SPECIFICATION

<b>Item NO</b>	<b>C3855u-6G-RM ( Black/Red )</b>
<b>Dimension</b>	L250*W430*H45mm
<b>Form Factor</b>	1U Rackmount
<b>Processor</b>	Intel® Celeron® Processor 3855U 1.6GHz
<b>Display</b>	Integrated Intel® HD Graphics510
<b>RAM</b>	2*DDR4 SODIMM,2133MHz,,MAX 32GB
<b>Storage</b>	1*SATA3.0 /1*SATA 2.5" HDD ,1*M.2 / 1*MSATA
<b>HDD Bays</b>	1*3.5" Bay Onboard
<b>Ethernet</b>	6*Intel WGI210AT 1000Mbps LANs,LAN5/6 POE
<b>USB</b>	2*USB2.0 (For AR1250D More 2*USB3.0 Ports)
<b>COM</b>	1*Console
<b>Display Port</b>	1*VGA
<b>Indicating LED</b>	1*PWR LED,1*HDD LED
<b>Controller</b>	1*PWR Button,1*PWR Socket
<b>Powersupply</b>	12V/5A (110~240V) Powersupply
<b>Working Temp.</b>	0°C ~ 45°C
<b>Storage Temp</b>	-20°C ~ 70°C
<b>Relative Humidity</b>	5%~95%,Non-Condensation
<b>Working Vibration</b>	0.5g rms/5-500HZ/random operating

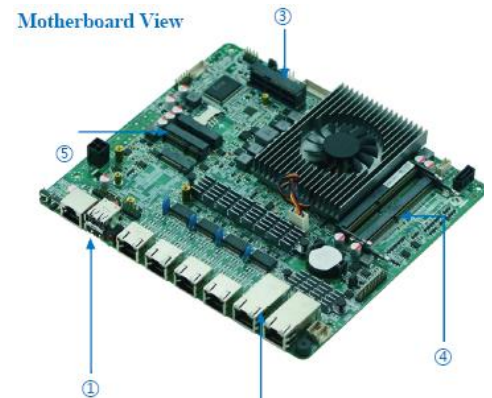

- ① FP Controller as above
- ② LAN5/6 POE function
- ③ 1\*SATA3.0 2.5 "Interface
- ④ 2\*DDR4 SODIMM,MAX32GB
- ⑤ 1\*M.2 2242 SDSlot Or 1\*MSATA SSD 6Gbps  
1\*Mini-PCIE(WIFI/3G mould),1\* SIM Socket